

Genius Gun PU Foam Gap Filler

Revision date: 5/08/2014

Page 1 of 2

Technical Data:

Base	Polyurethane
Consistency	Stable Foam (does not sag)
Curing System	Moisture Cure
Skin Formation (68°F at 60% R.H.)	Approx. 10 min.
Drying time	Approx. 90min – 1.2 inch foam bead (68°F/65% R.H.)
Foam Yield (linear feet)	Approx. 1500 linear feet for a bead of ¼
Foam Yield (FEICA OCF TM 1003)	20 oz yields 4.5 gallon cured foam
Shrink	<7%
Postexpansion	None
Cellular Structure	Ca 70-80% closed cells
Specific Gravity	Ca. 1.62lb/ft ³ (extruded, fully cured)
Temperature Resistance	-40°F until +194°F when cured Short term (up to 1 hour) 248°F
Color	Champagne
Fire Class	B3 (DIN4102 part2)
Water Absorption	1% Vol. (DIN53422)
Insulation Factor	36mW/meter Kelvin (DIN 52612)
Pressure Strength	Ca. 4.3 psi
Bowing Strength	Ca. 8.6 psi
Shear Strength	Ca. 20psi


Product:

Genius Gun Gap Filler PU Foam is a ready to use single component self expanding Polyurethane Foam. Due to the patented Genius Gun system the application of PU Foam becomes very easy and precise. The extrusion straw can be resealed which makes it possible to continue the application from a partially used canister for several weeks.

Characteristics:

- Excellent form stability – no shrink, no post expansion
- Excellent filling characteristics
- Excellent adhesion to all building materials (except PE, PP and PTFE)

- High insulation values, both thermal and acoustical
- Excellent installation performance

Applications:

- Filling of cavities
- Sealing and filling of openings and cavities in roof constructions
- Creation of an acoustic screen
- Creation of a sound deadening layer
- Improvement of insulation in cold store facilities
- All other usual PU Foam applications

 This information and all further technical advice are based on SOUDAL present knowledge and experience. However, SOUDAL assumes no liability for providing such information and advice including the extent to which such information and advice may relate to existing third party intellectual property rights, especially patent rights. In particular, SOUDAL disclaims all WARRANTIES EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY. SOUDAL SHALL NOT BE RESPONSIBLE FOR CONSEQUENTIAL, INDIRECT OR INCIDENTAL DAMAGES (INCLUDING LOSS OF PROFITS) OF ANY KIND. SOUDAL reserves the right to make any changes according to technological progress or further developments.



Genius Gun PU Foam Gap Filler

Revision date: 5/08/2014

Page 2 of 2

Packaging:

Aerosol canister of 20 oz (net content)

Shelf Life:

- 18 months from production date in unopened packaging in a cool and dry storage place at temperatures between +41°F and +77°F.
- Always store can with the valve pointed upwards

Application Instructions:

Shake the canister thoroughly for ca 30 seconds. Open the lid on the top and wear the enclosed gloves. Straighten the applicator tube.

Apply a fine water spray to the surface which needs to be clean and free of grease and dust.

Turn around the canister and extrude the foam carefully by applying pressure on the trigger.

Fill cavities on for 30 to 40 % as the foam will continue to expand during the curing process.

Shake canister regularly during the application. If Foam is applied in several layers, moisten between each layer of foam.

At the end of the application, close the applicator tube with the sealing plug and click into the holder. Close the lid. The canister can be reactivated for up to 6 weeks if resealed correctly.

Uncured foam can be removed with Foam Cleaner or acetone. Cured foam can only be removed mechanically.


Application temperature: +41°F to +86°F.

Health- and Safety Recommendation:

- Apply the usual industrial hygiene.
- Wear gloves and safety goggles.
- Remove cured foam by mechanical means only, never burn away

Remarks:

- Always moisten surfaces in order to improve curing and cellular structure
- Cured PU foam must be protected from UV-radiation by painting or applying a top layer of sealants (silicone, MS Polymer, etc.)
- For the filling of large volumes apply product in layers and moisten between each layer
- We recommend preliminary compatibility tests on surfaces on which PU Foams have not been applied previously.
- Always store canister with the valve pointed upwards

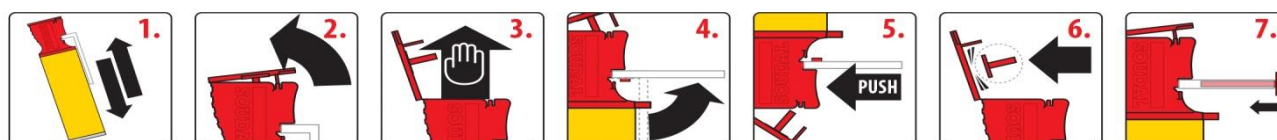

Preparation: 1: shake 30 seconds 2: open lid 3: wear gloves and safety goggles

Use: 4: Straighten applicator tube 5: turn canister and press the trigger

Storage after use: 6: remove sealing plug 7: seal applicator tube with the sealing plug and close the lid

This information and all further technical advice are based on SOUDAL present knowledge and experience. However, SOUDAL assumes no liability for providing such information and advice including the extent to which such information and advice may relate to existing third party intellectual property rights, especially patent rights. In particular, SOUDAL disclaims all WARRANTIES EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY. SOUDAL SHALL NOT BE RESPONSIBLE FOR CONSEQUENTIAL, INDIRECT OR INCIDENTAL DAMAGES (INCLUDING LOSS OF PROFITS) OF ANY KIND. SOUDAL reserves the right to make any changes according to technological progress or further developments.